

dK•LED-bar

Decorative LED-lighting
Even when it is NOT lit.



dK•LED-bars are a real supplementary to your outdoor visual identity and can be just that extra attention for the appearance of your petrol station or company facade. It is the ideal replacement for the traditional Neon-tube and applicable externally as well as internally. dK•LED-bars are robust, reliable, easy to install and come with a 240W unique safety power supply.




- 80% less energy consumption
- Reliable
- Bright constant lighting
- Easy and fast installation
- Weatherproof
- Recyclable materials
- On and off, a colored tube
- Strong impact resistant materials



LED

Decorative LED-lighting

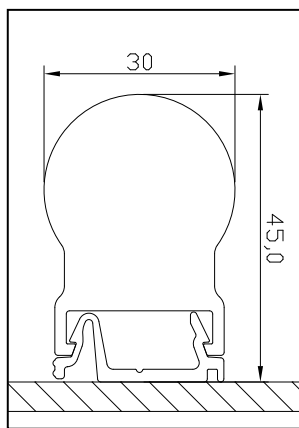

Delivery and assembly

The dK•LED bars are available in 30mm wide and supplied in standard lengths of 2.4 meters and the shorter fittings. The delivery of a LED bar directly includes the corresponding mounting clips, so these do not need to be ordered separately.


The dK•LED bars are equipped with male-female connection connectors which can be plugged together, then installed behind the bar mounting clip. All cables and connections are nicely hidden away behind the tube.

Technical specifications

	dK-LED III
Diameter	30mm
Standard length	2400mm
Other lengths	Delivery on demand Adjustables available
Material housing	Extruded PMMA
Output voltage	40V tot 48V DC
Input mains	85V tot 264V
Safety frequency	47Hz tot 63Hz
IP rating Led-contour	Led-contour: IP66 Driver: IP67
Operating temperature	-30° C to +60° C
Humidity	20% to 95% (non-condensing)

Color specifications

Color	Color reference	W/mtr	Expected lifetime in hours at 70% brightness	Max length per 240W safety power supply
Red	PMS 485C	5,0	100.000	48m total - max 24m per output
Orange	PMS 172C	5,0	100.000	48m total - max 24m per output
Yellow (lemon)	PMS 116C	5,0	70.000	48m total - max 24m per output
Warm yellow	PMS 7406C	5,0	100.000	48m total - max 24m per output
Green	PMS 368C	1,8	80.000	90m total - max 45m per output
Blue	PMS 280C	5,0	50.000	48m total - max 24m per output
White	N/A	5,0	70.000	48m total - max 24m per output

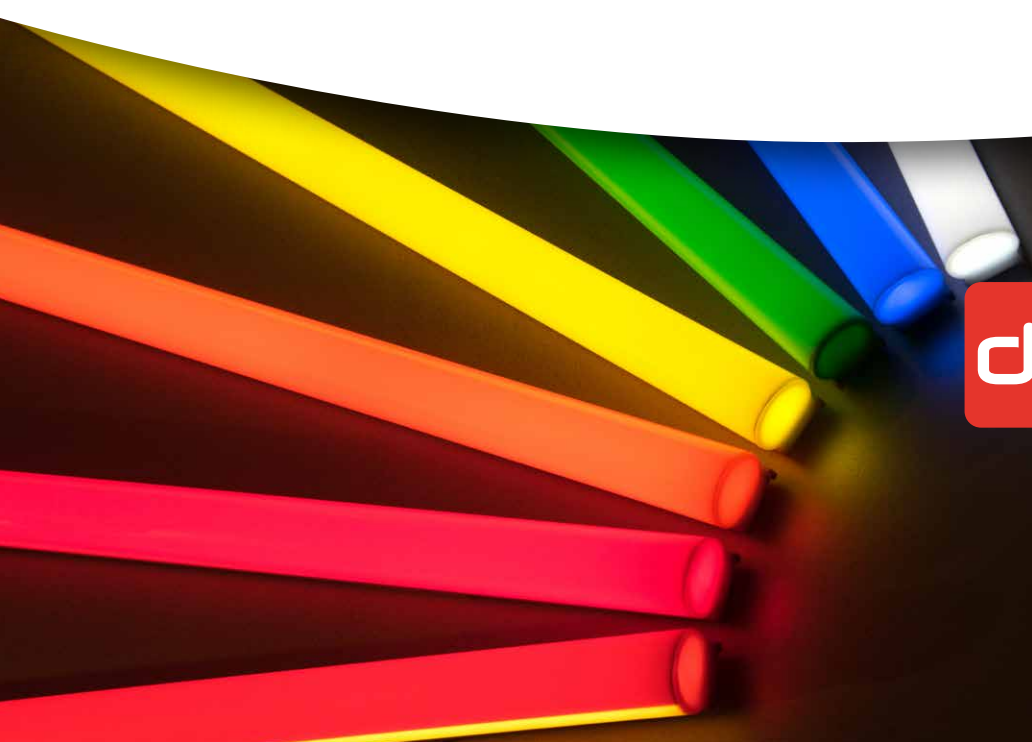

dK-LED
Ekkersrijt 1209
5692 AG Son en Breugel
The Netherlands

Telefoon: +31 499 476 777
info@dkled.nl
www.dkled.nl