

Shell Duo Colour LED Stripe

Specifications



Duo Colour Led Stripe	
Diameter:	30mm
Height:	45mm
Standard length:	1400mm - 2700mm
	Left hand and right hand adjustable
Material housing:	Extruded PMMA
LED brand:	Samsung
LED colour:	White 4000K
No. of LEDs used:	58 per m
Nominal power consumption:	4.8W per m
Expected lifetime (70% brightness):	100.000 (h)
IP rating LED tube:	IP66
Max length on 240W PSU:	24m per output


Power Supply	
Output Voltage:	46V DC - SELV
Input mains Voltage:	90V to 264VAC
IP rating driver:	IP67
Marking:	CE - CCC - C UR US
Safety:	Current Sense Circuit

Environmental	
Operating temperature:	-30° C to +50° C
Humidity:	30% to 95%
HS-code	9405 40 39 90


Product overview



DK-DC-SH270 (straight section 2700mm)
DK-DC-SH140 (straight section 1400mm)

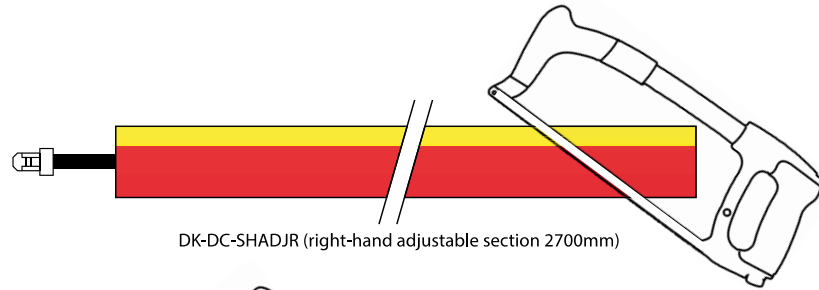

DK-DC-SHADJR (right-hand adjustable section 2700mm)

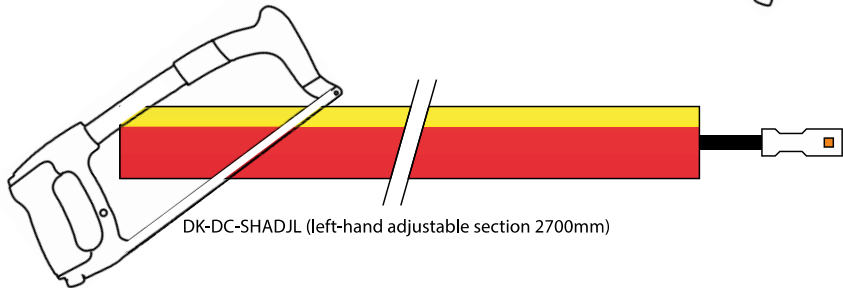

DK-DC-SHADJL (left-hand adjustable section 2700mm)




DK-JC-1000 (1m connection cable)
DK-JC-3000 (3m connection cable)



DK-GEN-KIT (gender change kit)




DK-BLANK
(end of circuit blanking plug - supplied with PSU)

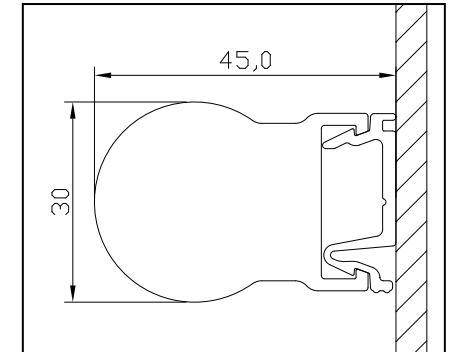


DK-PSU-240
(240W IP67 power supply unit)



DK-JC-YSPLIT-FMM (female to 2 x male splitter)

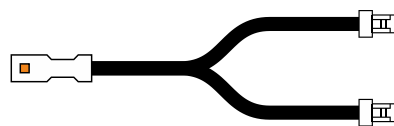

DK-JC-YSPLIT-MFF (male to 2 x female splitter)



Mounting clip